



Exhaust Bellows

Application	Bellows are used in large exhaust systems and in systems with long exhaust piping or tubing runs to compensate for thermal growth as the system warms up. Bellows are recommended for all exhaust systems with an OD of 10" and over.
Construction	<ul style="list-style-type: none">• 2-ply 321 stainless steel with carbon flanges (S304 and S316 flanges also available)

Flex Connectors

Application	Flex connectors are used in smaller systems where thermal expansion is not a major concern. The primary purpose is to isolate vibration from the rest of the exhaust system.
Construction	<ul style="list-style-type: none">• 321 stainless steel with carbon flanges (S304 and S316 flanges also available)

For questions or to request a quote for a custom connector, email gtexhaust.sales@nelsongp.com

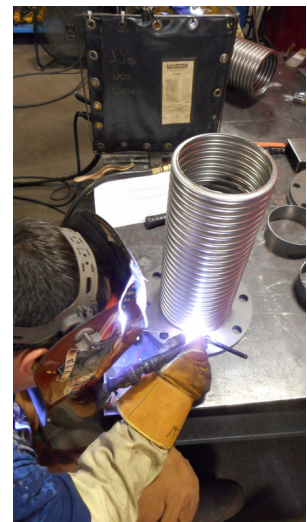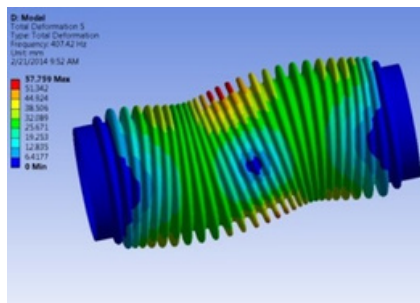

GT-Silex⁺
A Nelson Global Company